INCOMPARABLE DEEP CYCLE AGM BATTERY


LDC12-180 (12V180Ah)


LEOCH BATTERY




CHARACTERISTICS

Item		Specifications
Voltage		12V
Dimension	Length	483mm (19.0inches)
	Width	170mm (6.69inches)
	Container Height	238.5mm (9.39inches)
	Total Height	238.5mm (9.39inches)
Approx Weight		50.1kg (110.5lbs)
Terminal		T11(M8)
Container Material		ABS
Reserve Capacity	25A	395min
	56A	155min
Capacity	20HR	180Ah
	5HR	162Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)

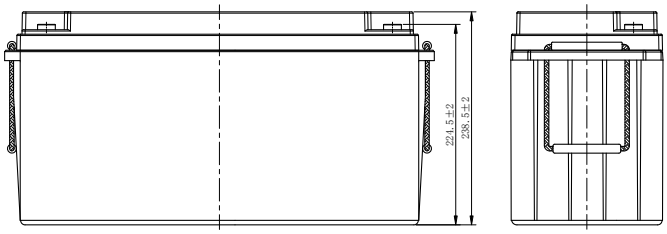

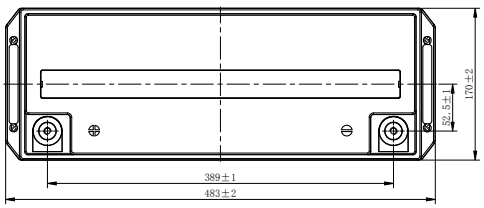



T11

APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing
- Cleaning equipment
- AWP
- Mobility

carbon

AGM-GEL technology

Note: Terminal Torque Values in-lb(Nm):97.28-130.0(11.0-14.7)

INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-180 (12V180Ah)

LEOCH BATTERY

GENERAL FEATURES

Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature

Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

Delay PAM softening and shedding

- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density


Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology


Optimize electrolyte stratification

- Introduce AGM-GEL technology


Charging Profiles

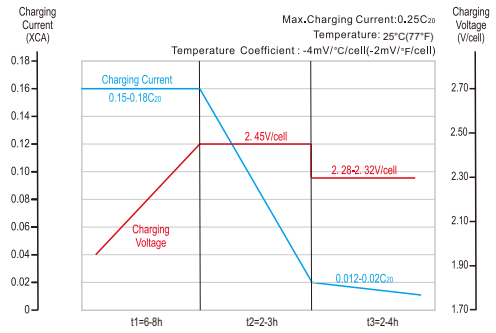


Relationship of OCV and State Of Charge

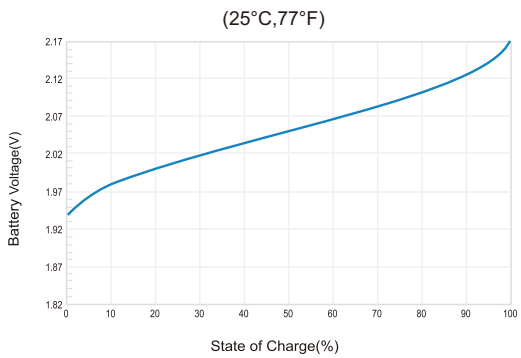

Cycle Life in Relation to Depth Of Discharges

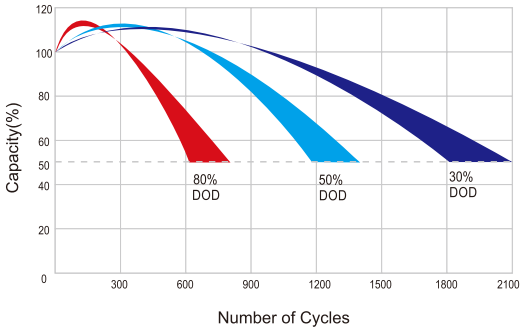

Self-discharge Characteristics

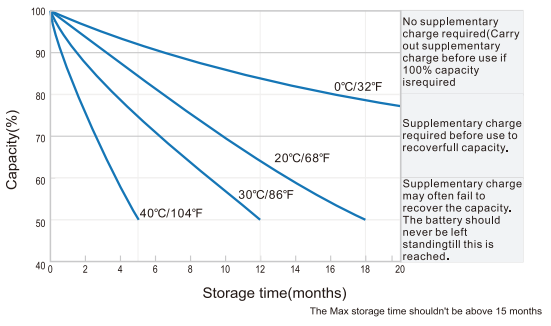

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved.Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.Subject to revisions without prior notice. E&OE.

Publication No.:LB-LDC12-180-PD-EN-V1.2-20250816